


SLI-16/2CS

16/2 Speaker Wire Cable



SLICK CABLE


CROSS SECTION

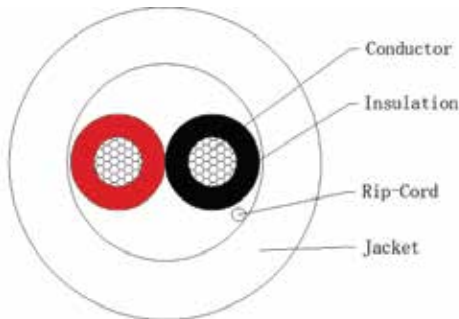

COLORS



Black



White

DESCRIPTION

Printed Description: SLICK CABLE
SLI-16/2CS SPEAKER CABLE
Cable Gauge: 16AWG 2C
Cable Color: Black or White
Cable Type: Speaker Cable
Conductor Count: 2
Specification: UL13



CONSTRUCTION

Conductor Construction (mm):
65x0.16±0.01
Insulation Material: PVC
Insulation Diameter (mm): 2.1±0.1
Average Thickness Nom. (mm): 0.30
Jacket Material: PVC
Jacket Diameter (mm): 5.2±0.3

PACKAGING

Box: 1000' Wire
Conductor color: Black, Red
Rip-cord included



PERFORMANCE

Conductor DCR 20°C: ≤13.7 Ohms/KM
Dielectric Strength: AC 500V/1Minute
(No Breaks)
Spark Test: 2.5KV for 0.15 seconds (No Breaks)
Minimum Bending Radius: 15xOD
Cold Bend Test: -20C° x 4Hrs (No Cracks)
Operating Temperature Range: -20C° ~ +75C°
Operating Voltage: 300V
Flame Test: CL3