


SLI-12/4X

12/4 Direct Burial Speaker Wire Cable



SLICK CABLE


CROSS SECTION

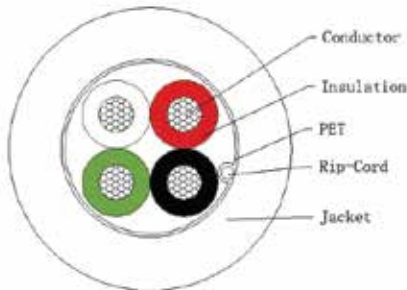

COLORS



Black



White

DESCRIPTION

Printed Description: SLICK CABLE
SLI-12/4X DIRECT BURIAL SPEAKER
CABLE

Cable Gauge: 12AWG 4C

Cable Color: Black or White

Cable Type: Direct Burial

Conductor Count: 4

Specification: UL13



CONSTRUCTION

Conductor Construction (mm):

105x0.20±0.01

Insulation Material: PVC

Insulation Diameter (mm): 3.2±0.1

Average Thickness Nom. (mm): 0.40

Tape Material: PET

Jacket Material: PVC

Jacket Diameter (mm): 9.7±0.4

PACKAGING

Spool: 500' Wire

Conductor color: Black, Red, White,
Green

Rip-cord included



PERFORMANCE

Conductor DCR 20°C: ≤5.41 Ohms/KM

Dielectric Strength: AC 500V/1Minute
(No Breaks)

Spark Test: 2.5KV for 0.15 seconds (No Breaks)

Minimum Bending Radius: 15xOD

Cold Bend Test: -20C° x 4Hrs (No Cracks)

Operating Temperature Range: -20C° ~ +75C°

Operating Voltage: 300V

Flame Test: CL3