


# SLI-16/2X

16/2 Direct Burial Speaker Wire Cable



**SLICK CABLE**


## CROSS SECTION

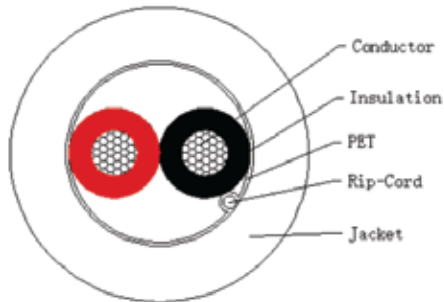

## COLORS



Black



White

## DESCRIPTION

**Printed Description:** SLICK CABLE  
SLI-16/2X DIRECT BURIAL SPEAKER  
CABLE

**Cable Gauge:** 16AWG 2C

**Cable Color:** Black or White

**Cable Type:** Direct Burial

**Conductor Count:** 2

**Specification:** UL13



## CONSTRUCTION

**Conductor Construction (mm):**

65x0.16±0.01

**Insulation Material:** PVC

**Insulation Diameter (mm):** 2.1±0.1

**Average Thickness Nom. (mm):** 0.30

**Jacket Material:** PVC

**Tape Material:** PET

**Jacket Diameter (mm):** 5.9±0.3

## PACKAGING

**Box:** 500' Wire

**Conductor color:** Black, Red

**Rip-cord included**



## PERFORMANCE

**Conductor DCR 20°C:** ≤13.7 Ohms/KM

**Dielectric Strength:** AC 500V/1Minute  
(No Breaks)

**Spark Test:** 2.5KV for 0.15 seconds (No Breaks)

**Minimum Bending Radius:** 15xOD

**Cold Bend Test:** -20C° x 4Hrs (No Cracks)

**Operating Temperature Range:** -20C° ~ +75C°

**Operating Voltage:** 300V

**Flame Test:** CL3